


Product No.	System Power*	LED Lumen	Beam Angle	Colour Temp	CRI	Driver
109150.000	62.4W	5660Lm (52W)	40°	4000K	90+	1400mA




■ Product Features

- Diecast aluminium housing
- IP54 from below
- 40° reflector fitted as standard, 12°, 20°, 70° reflectors available
- Clear glass
- 30° cut-off angle to create visual comfort
- Easy to install with two springs
- Supplied complete with remote electronic LED driver
- DALI and other dimming options available up on request
- Finish: 3S White ceiling trim as standard
- *Connected electrical loads are rated values and subject to a tolerance of +/- 10%



■ Product Dimensions

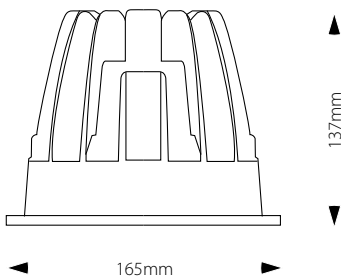



■ Reflector Polar Curve

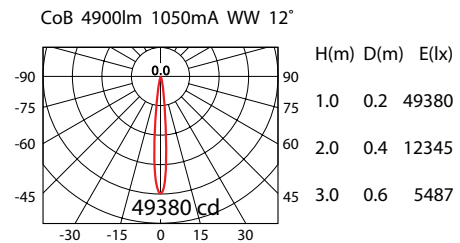

■ Product Standard

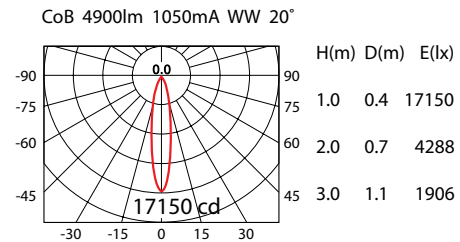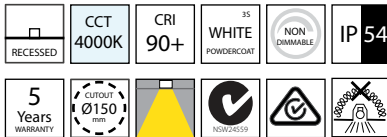

■ Product Options

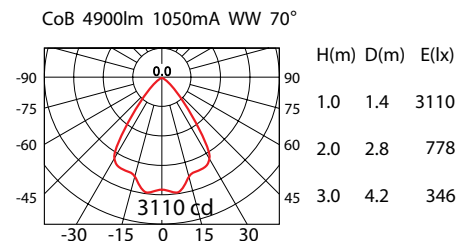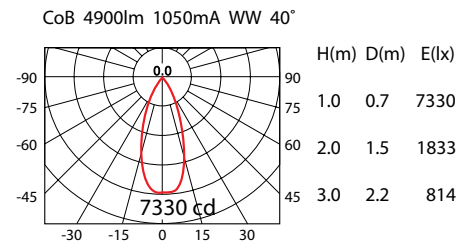

■ Luminaire Specification

Product No.	Beam Angle	Colour Temp	LED Output	System Power	Driver	Trim Colour
109150.XYZ	<input type="checkbox"/> 12°	<input type="checkbox"/> 4000K	<input type="checkbox"/> 3600lm (CRI 90)	40.8W	<input type="checkbox"/> NON-DIM	<input type="checkbox"/> 3S WHITE
			<input type="checkbox"/> 4530lm (CRI 90)	45.6W		
	<input type="checkbox"/> 20°		<input type="checkbox"/> 5660lm (CRI 90)	62.4W	<input type="checkbox"/> DALI	<input type="checkbox"/> 3S BLACK
		<input type="checkbox"/> 3000K	<input type="checkbox"/> 3500lm (CRI 90)	40.8W		
			<input type="checkbox"/> 4400lm (CRI 90)	45.6W		
	<input type="checkbox"/> 40°	<input type="checkbox"/> 3000K	<input type="checkbox"/> 5500lm (CRI 90)	62.4W	<input type="checkbox"/> 1-10V	<input type="checkbox"/> CUSTOM
			<input type="checkbox"/> 70°			

■ Luminaire Configuration

Accessories	<input type="checkbox"/> Honeycomb	<input type="checkbox"/> Spreader Lens	<input type="checkbox"/> Frosted Glass	Connectivity	<input type="checkbox"/> Casambi	<input type="checkbox"/> Tridonic basicDIM Wireless	<input type="checkbox"/> XICATO GalaXi
-------------	------------------------------------	--	--	--------------	----------------------------------	---	--

"XYZ" - Part No. to be advised by 3S Lighting based on the combination of configurable options selected

■ Project Information

Project Name:		Type:	
Quantity:		Expected Due Date:	
Client's Name:		Date of Issue:	
Notes:		Signature:	

■ APPs (with XID / TBW driver only)



CASAMBI, Tridonic basicDim Wireless and XICATO Galaxi

Lighting control solutions provide for all the control options that are expected from a full featured professional lighting control solution, Apps available for both iOS and Android.

[... click for more information](#)