


| Product No. | System Power* | LED Lumen | Beam Angle | Colour Temp | CRI | Driver |
|-------------------|---------------|-----------|------------|-------------|-----|--------|
| 709060.000 | 5.4W | 750Lm | 36° | 4000K | 80+ | 150mA |




■ Product Features

- G316 grade Stainless steel trim with flush safety glass and diecast aluminium recessed body
- IP67 / IP68 1M, Static Force 20KN and IK10 protection
- 30° Cutoff
- 355° rotation
- 30° Tilting
- 36° reflector fitted as standard
- 15°/24°/50° reflectors available on request
- Supplied complete with efficient heat sink and integral electronic LED driver
- Supplied complete with 1m connection cable for wiring to junction box
- Supplied complete with plastic pre-install housing
- Available with Square trim to order
- *Connected electrical loads are rated values and subject to a tolerance of +/- 10%

■ Product Dimensions

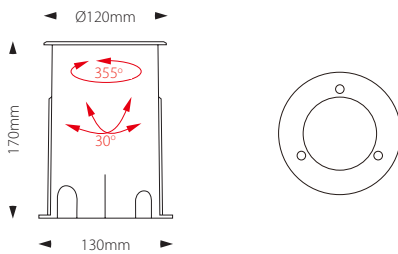

■ Reflector Polar Curve

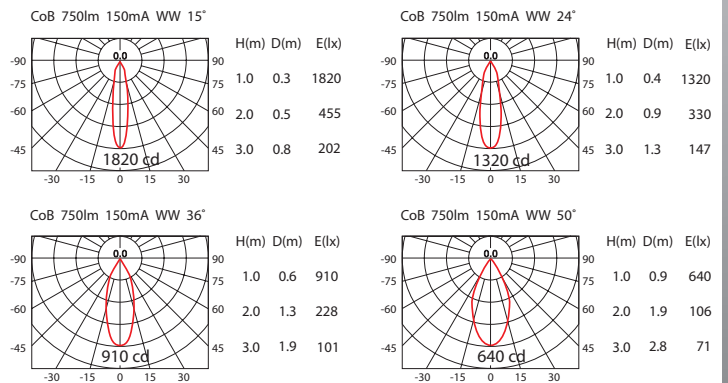

■ Product Standard



■ Product Options



■ Optional Accessories

