

Product No.	System Power / m*	LED Lumen / m	Colour Temp	CRI	Driver
805190.000	34.49W	5537lm	4000K	80+	Non Dim




LIGHTSOURCE BY
TRIDONIC


■ Product Features

- Clip in LED diffuser for uniform light distribution
- LED Lamp options: LED LLE24 3000K/4000K, CRI>80
- Driver options: Non Dimmable, DALI, BLE wireless, DSI, corridorFUNCTION and ready2mains
- Finished in 3S White , 3S Black or Natural Anodised, (other colours to specification)

■ Product Dimensions

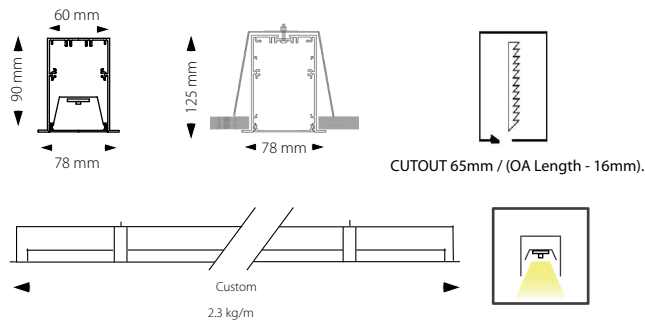

■ Reflector Polar Curve

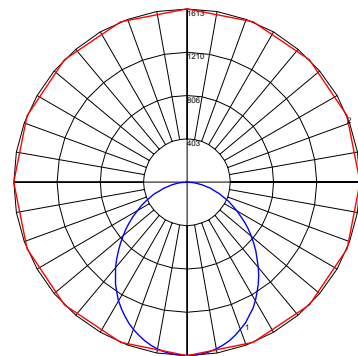


NRLED Diffuser

■ Product Standard



■ Product Options

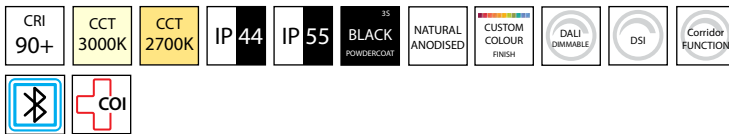

■ Luminaire Specification

Product No.	Colour Temp	LED Lumen / m	CRI	Typical System Power / m	Driver	Diffuser	Trim Colour	
805190.XYZ	<input type="checkbox"/> 4000K	<input type="checkbox"/> 1469lm	80	8.13W	<input type="checkbox"/> NON- DIM	<input type="checkbox"/> NRLED	<input type="checkbox"/> 3S WHITE	
		<input type="checkbox"/> 2898lm	80	16.64W			<input type="checkbox"/> 3S BLACK	
		<input type="checkbox"/> 4494lm	80	27.67W	<input type="checkbox"/> DALI		<input type="checkbox"/> NAT ANO	
		<input type="checkbox"/> 5537lm	80	34.49W			<input type="checkbox"/> CUSTOM	
	<input type="checkbox"/> 3000K	<input type="checkbox"/> 1404lm	80	8.13W				
		<input type="checkbox"/> 2769lm	80	16.64W				
		<input type="checkbox"/> 4295lm	80	27.68W				
		<input type="checkbox"/> 5291lm	80	34.49W				
	Notes							

■ Luminaire Configuration

Mounting Options	<input type="checkbox"/> Recessed	Connectivity	<input type="checkbox"/> Casambi <input type="checkbox"/> TRIDONIC basicDIM Wireless <input type="checkbox"/> Xicato Galaxi
Supply Lead	<input type="checkbox"/> 3Core Flex 2m <input type="checkbox"/> Flex & Plug 1.5m <input type="checkbox"/> 5Core Flex <input type="checkbox"/> Terminal Block	Accessories	<input type="checkbox"/> EM Module <input type="checkbox"/> LED Downlight <input type="checkbox"/> LED Uplight
End Caps	<input type="checkbox"/> IP Gasket	Lamp Configuration	<input type="checkbox"/> Continuous <input type="checkbox"/> Other
Driver	<input type="checkbox"/> Integral <input type="checkbox"/> Remote		

Basic Unit Lengths 1124mm 2248mm 2810mm 5058mm Add 22mm (End Cap) to your configuration to achieve Over All Length of the Linear System

“XYZ” - Part No. to be advised by 3S Lighting based on the combination of configurable options selected

■ Notes

■ Project Information

Project Name:		Type:	
Quantity:		Expected Due Date:	
Client's Name:		Date of Issue:	
Notes:		Signature:	

■ Light Source

TRIDONIC

Talx LLE24 Boards ADV Gen5

Initial Color Consistency: 3 SDCM Lumen Maintenance: L70/B10 at 72,000 hours Color Temperatures: 2700K, 3000K, 4000K Warranty: 5 years Long life-time: up to 72,000 hours

[... click for more information](#)

■ APPs (with XID / TBW driver only)



CASAMBI, Tridonic basicDim Wireless and XICATO Galaxi
Lighting control solutions provide for all the control options that are expected from a full featured professional lighting control solution, Apps available for both iOS and Android.

[... click for more information](#)