


Product No.	LED Wattage*	Colour Temp	Direction	Driver
800030.000	10W/M	4000K (580Lm/M)**	HORIZONTAL BEND	DC24V, REMOTE






■ Product Features

- 5M/reel flexible & cuttable LED module
- Dot free, seamless light without shadows
- 3 step McAdam, LM 80 compliant
- LED protection IP68 rated, resistant to solvents, saltwater and UV
- Bending radius 150mm
- LED Colour Temperature options**:
 - 3000K (330Lm/M)
 - 6500K (650Lm/M)
 - RGB (310Lm/M)
 - Red (204Lm/M)
 - Green (300Lm/M)
 - Blue (168Lm/M)
 - Yellow (380Lm/M)
- Driver options: Non Dimmable, Phase Dim, DALI, DSI, BLE wireles, 1-10V, Cassambi
- *Connected electrical loads are rated values and subject to a tolerance of +/- 10%

■ Product Dimensions

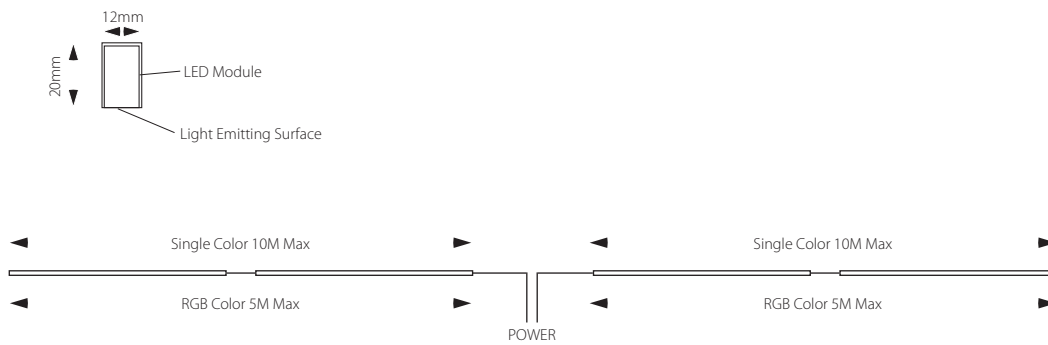

■ Reflector Polar Curve

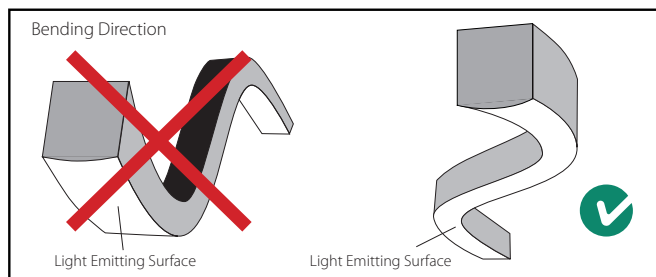

■ Accessories


MOUNTING CLIPS



END CAP



IP68 CONNECTOR



CURVED STAINLESS STEEL PROFILE



ALUMINIUM PROFILE



300MM TAIL

FLEXIBLE IP68 LED STRIP