


Product No.	LED Wattage*	Colour Temp	Direction	Driver
800025.000	10W/M	4000K (900Lm/M)**	VERTICAL BEND	DC24V, REMOTE






■ Product Features

- 5M/reel flexible & cuttable LED module
- Dot free, seamless light without shadows
- 3 step McAdam, LM 80 compliant
- LED protection IP68 rated, resistant to solvents, saltwater and UV
- Bending radius 150mm
- LED Colour Temperature options\*\*:
  - 3000K (850Lm/M)
  - 6500K (950Lm/M)
  - RGBW
  - RGB (380Lm/M)
  - Red (250Lm/M)
  - Green (380Lm/M)
  - Blue (180Lm/M)
  - Yellow (490Lm/M)
- Driver options: Non Dimmable, Phase Dim, DALI, DSI, BLE wireles, 1-10V, Cassambi
- \*Connected electrical loads are rated values and subject to a tolerance of +/- 10%

■ Product Dimensions

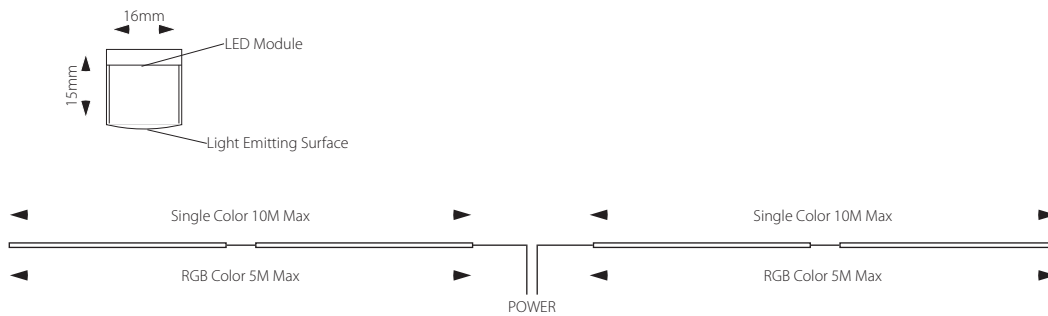

■ Reflector Polar Curve

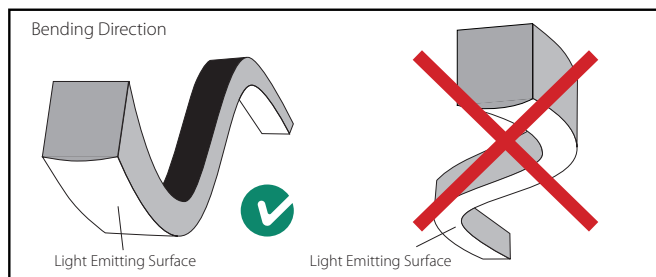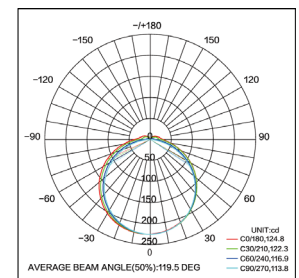

■ Accessories


MOUNTING CLIPS



END CAP



IP68 CONNECTOR



300MM TAIL

ALUMINIUM PROFILE



FLEXIBLE IP68 LED STRIP