



Product No.	LED WATTAGE	Colour Temp*	CRI	Driver
800036.000	6W/M	_____	90	DC24V, REMOTE

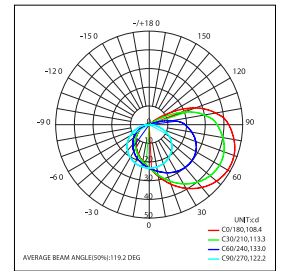


Technical data:

- 5 M/reel flexible & cuttable LED module (25mm)
- Dot free, seamless light without shadows
- 3 step McAdam, LM 80 compliant
- LED protection IP65 rated, resistant to solvents, saltwater and UV
- Bending radius 50mm
- LED Colour Temperature options*:
 - 2100K (200Lm/M)
 - 2400K (212Lm/M)
 - 2600K (219Lm/M)
 - 3000K (253Lm/M)
 - 3500K (223Lm/M)
 - 4200K (214Lm/M)
 - 5300K (221Lm/M)
- Driver options: Non Dimmable, Phase Dim, DALI, DSI, BLE wireless and more upon request
- Accessories: mounting clips, end caps, connectors and aluminium profile
- Connected electrical loads are rated values and subject to a tolerance of +/- 10%
- NSW24559

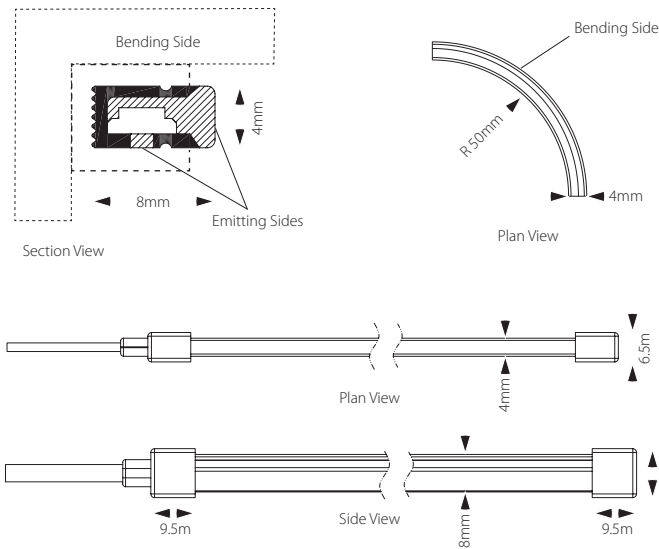


Accessories

END CAP



MOUNTING CLIPS



ALUMINIUM PROFILE



Application Suggestions



FLEXIBLE IP65 LED STRIP