


Product No.	System Power*	LED Lumen	Beam Angle	Colour Temp	CRI	Driver
209114.000	29W	3400Lm (25.5W)	40°	4000K	80+	700mA




■ Product Features

- High quality aluminium housing with safety glass
- Protection rated IP65
- 40° reflector fitted as standard
- 12°, 20° & 60° reflectors available on request
- Light emission on one side
- Supplied complete with integral electronic LED driver
- Finish: 3S Black as standard
- *Connected electrical loads are rated values and subject to a tolerance of +/- 10%



■ Product Dimensions

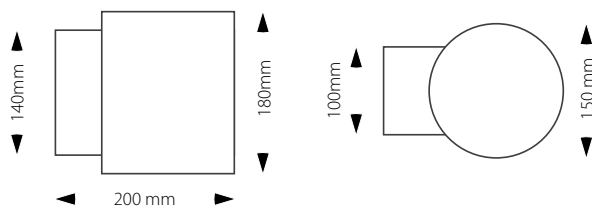



■ Reflector Polar Curve

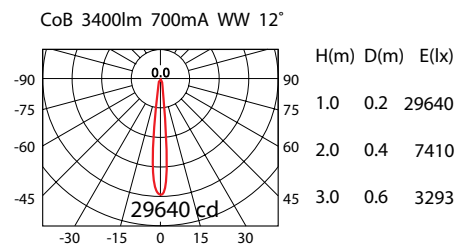

■ Product Standard

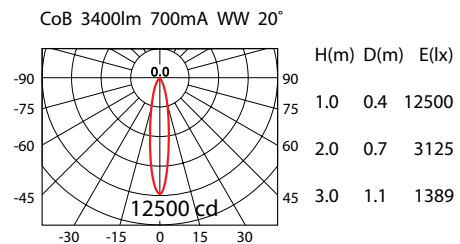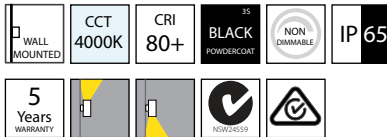

■ Product Options

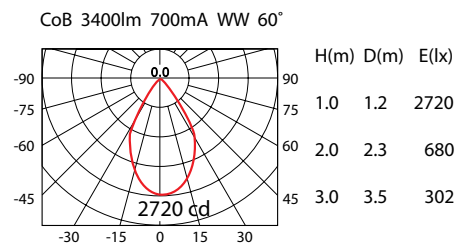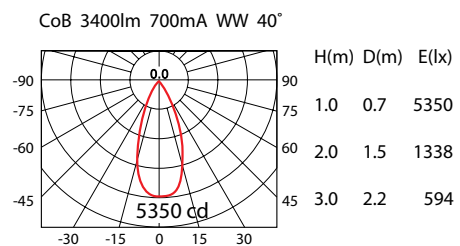

■ Luminaire Specification

Product No.	Beam Angle	Colour Temp	LED Output	System Power	Driver	Trim Colour
209114.XYZ	<input type="checkbox"/> 10°	<input type="checkbox"/> 4000K	3400lm (CRI 80)	29W	<input type="checkbox"/> NON-DIM <input type="checkbox"/> DALI <input type="checkbox"/> 1-10V	<input type="checkbox"/> 3S WHITE
	<input type="checkbox"/> 20°					<input type="checkbox"/> 3S BLACK
	<input type="checkbox"/> 40°	<input type="checkbox"/> 3000K	3400lm (CRI 80)	29W		<input type="checkbox"/> CUSTOM666
	<input type="checkbox"/> 60°					

■ Luminaire Configuration

Connectivity Casambi Tridonic basicDIM Wireless XICATO GalaXi

"XYZ" - Part No. to be advised by 3S Lighting based on the combination of configurable options selected

■ Project Information

Project Name:		Type:	
Quantity:		Expected Due Date:	
Client's Name:		Date of Issue:	
Notes:		Signature:	

■ APPs (with XID / TBW driver only)



CASAMBI, Tridonic basicDim Wireless and XICATO Galaxi

Lighting control solutions provide for all the control options that are expected from a full featured professional lighting control solution, Apps available for both iOS and Android.

[... click for more information](#)