


Product No.	System Power*	LED Lumen	Beam Angle	Colour Temp	CRI	Driver
<b>209602.000</b>	62.4W	5660Lm (52W)	Oval (60° x 30°)	4000K	90+	1400mA




■ Product Features

- Aluminium housing with clear glass
- Protection rated IP65
- Elliptical distribution PMMA lens
- Supplied complete with Integral electronic LED driver
- Finish: 3S White as standard
- \*Connected electrical loads are rated values and subject to a tolerance of +/- 10%


■ Product Dimensions

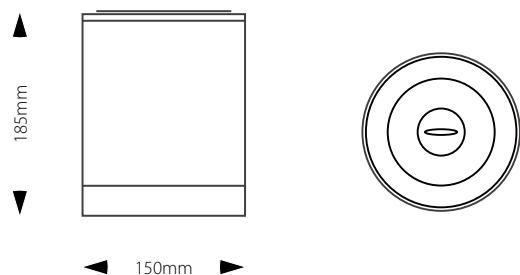

■ Reflector Polar Curve



■ Product Standard

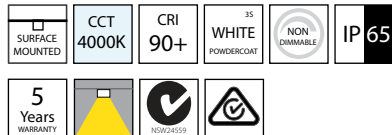

■ Product Options



■ Luminaire Specification

Product No.	Beam Angle	Colour Temp	LED Output	System Power	Driver	Trim Colour
209602.XYZ	<input type="checkbox"/> 60° x 30°	<input type="checkbox"/> 4000K	<input type="checkbox"/> 3600lm (CRI 90)	40.8W	<input type="checkbox"/> NON-DIM  <input type="checkbox"/> DALI  <input type="checkbox"/> 1-10V	<input type="checkbox"/> 3S WHITE
			<input type="checkbox"/> 4530lm (CRI 90)	45.6W		<input type="checkbox"/> 3S BLACK
			<input type="checkbox"/> 5660lm (CRI 90)	62.4W		
		<input type="checkbox"/> 3000K	<input type="checkbox"/> 3500lm (CRI 90)	40.8W		
			<input type="checkbox"/> 4400lm (CRI 90)	45.6W		<input type="checkbox"/> CUSTOM
			<input type="checkbox"/> 5500lm (CRI 90)	62.4W		

■ Luminaire Configuration

Connectivity  Casambi  Tridonic basicDIM Wireless  XICATO GalaXi

"XYZ" - Part No. to be advised by 3S Lighting based on the combination of configurable options selected

■ Project Information

Project Name:		Type:	
Quantity:		Expected Due Date:	
Client's Name:		Date of Issue:	
Notes:		Signature:	

■ APPs (with XID / TBW driver only)



CASAMBI, Tridonic basicDim Wireless and XICATO Galaxi

Lighting control solutions provide for all the control options that are expected from a full featured professional lighting control solution, Apps available for both iOS and Android.

[... click for more information](#)