

Product No.	System Power*	System Lum Flux	Colour Temp	CRI	Driver
<b>605008.036</b>	15W	1648Lm	4000K	80+	Non Dim

See more standard options from luminaire specification




LIGHTSOURCE BY  
**TRIDONIC**


■ **Product Features**

- One piece body construction
- T - bar recessed installation
- Plaster kits, surface mount kits and wire suspension available on request
- Frosted tube diffuser and louvred for low UGR, smooth light distribution
- LED Lamp options: LED LLE24 3000K/4000K, CRI>80
- Supplied complete with remote electronic LED driver
- Driver options: Non Dimmable, DALI, BLE wireless and corridorFUNCTION
- Finished in 3S White (other colours to specification)
- \*Connected electrical loads are rated values and subject to a tolerance of +/- 10%

■ **Product Dimensions**

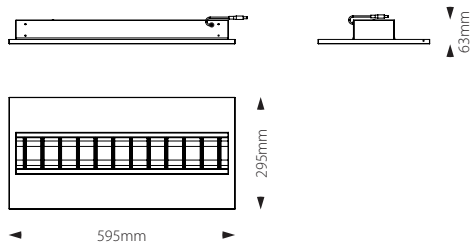

■ **Reflector Polar Curve**

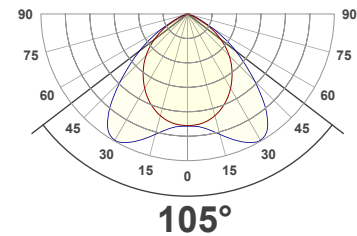


■ **Product Standard**




■ **Product Options**



■ **Plaster Kits**

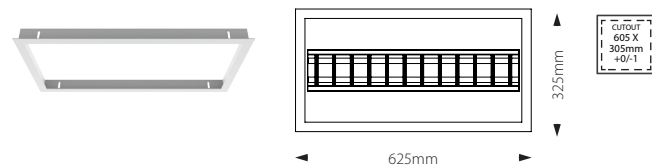

■ **Surface Mount and Wire Suspension Kits**

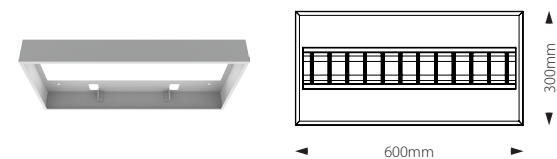

■ Luminaire Specification

Product No.	Colour Temp	System Lum Flux	CRI	Typical System Power	Driver	Body Colour
605008.036	<input type="checkbox"/> 4000K	<input type="checkbox"/> 2156lm	80+	20W	<input type="checkbox"/> NON- DIM  <input type="checkbox"/> DALI	<input type="checkbox"/> 3S WHITE
		<input type="checkbox"/> 1648lm	80+	15W		<input type="checkbox"/> 3S BLACK
	<input type="checkbox"/> 3000K	<input type="checkbox"/> 2061lm	80+	20W		<input type="checkbox"/> CUSTOM
<input type="checkbox"/> 1575lm		80+	15W			
	Notes					

■ Luminaire Configuration

Mounting Options	<input type="checkbox"/> T-bar recessed	<input type="checkbox"/> Plaster recessed	<input type="checkbox"/> Surface mounted	<input type="checkbox"/> Surface mount kit with suspension wires
Supply Lead	<input type="checkbox"/> 3Core Flex 2m	<input type="checkbox"/> Flex & Plug 1.5m	<input type="checkbox"/> 5Core Flex	<input type="checkbox"/> Terminal Block
Connectivity	<input type="checkbox"/> Casambi	<input type="checkbox"/> Xicato Galaxi	<input type="checkbox"/> TRIDONIC basicDIM Wireless	

"XYZ" - Part No. to be advised by 3S Lighting based on the combination of configurable options selected

■ Notes

■ Project Information

Project Name:		Type:	
Quantity:		Expected Due Date:	
Client's Name:		Date of Issue:	
Notes:		Signature:	

■ Light Source

**TRIDONIC**

Tallex LLE24 Boards ADV Gen5

Initial Color Consistency: 3 SDCM

Lumen Maintenance: L70/B10 at 72,000 hours

Color Temperatures: 4000K

Warranty: 5 years

Long life-time: up to 72,000 hours

■ APPs (with XID / TBW driver only)



CASAMBI, Tridonic basicDim Wireless and XICATO Galaxi

Lighting control solutions provide for all the control options that are expected from a full featured professional lighting control solution, Apps available for both iOS and Android.

[... click for more information](#)