


| Product No. | System Power | LED Lumen | Colour Temp | CRI | Driver |
|-------------------|--------------|-----------|-------------|-----|---------|
| 805192.010 | 34.49W | 5537lm | 4000K | 80+ | Non Dim |


LIGHTSOURCE BY
TRIDONIC



■ Product Features

- Aluminium and steel construction
- Clip in LED diffuser for uniform light distribution
- LED Lamp options: LED LLE24 3000K/3500K/4000K, CRI>80
- LED is subject to change
- Supplied complete with integral electronic LED driver
- Driver options: Non Dimmable, DALI, BLE wireless, DSI, corridorFUNCTION and ready2mains
- Installation: Wall Mount
- Finished in 3S White (other colours to specification)
- *Connected electrical loads are rated values and subject to a tolerance of +/- 10%

■ Product Dimensions

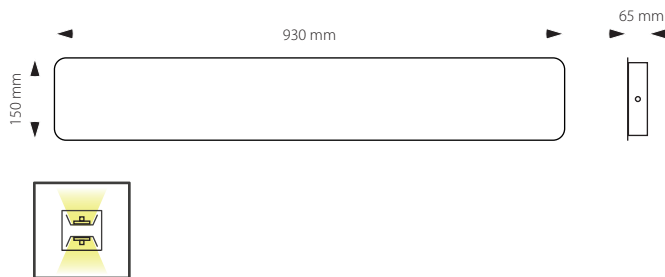

■ Product Standard



■ Product Options



■ Luminaire Specification

| Product No. | Colour Temp | LED Lumen / m | CRI | Typical System Power / m | Driver | Diffuser | Trim Colour | | |
|-------------|--------------------------------|------------------------------------|--------|--------------------------|--------|--|--------------------------------|-----------------------------------|---------------------------------|
| 805192.XYZ | <input type="checkbox"/> 4000K | <input type="checkbox"/> Downlight | 1469lm | 80 | 8.13W | <input type="checkbox"/> NON- DIM <input type="checkbox"/> DALI | <input type="checkbox"/> NRLED | <input type="checkbox"/> 3S WHITE | |
| | | <input type="checkbox"/> Downlight | 2898lm | 80 | 16.64W | | | <input type="checkbox"/> 3S BLACK | |
| | | <input type="checkbox"/> Downlight | 4494lm | 80 | 27.67W | | | | |
| | | <input type="checkbox"/> Downlight | 5537lm | 80 | 34.49W | | | | |
| | <input type="checkbox"/> 3000K | <input type="checkbox"/> Downlight | 1404lm | 80 | 8.13W | | | | <input type="checkbox"/> CUSTOM |
| | | <input type="checkbox"/> Downlight | 2769lm | 80 | 16.64W | | | | |
| | | <input type="checkbox"/> Downlight | 4295lm | 80 | 27.68W | | | | |
| | | <input type="checkbox"/> Downlight | 5291lm | 80 | 34.49W | | | | |
| | <input type="checkbox"/> 4000K | <input type="checkbox"/> Uplight | 1448lm | 80 | 8.32W | | | | |
| | <input type="checkbox"/> 3000K | <input type="checkbox"/> Uplight | 1384lm | 80 | 8.32W | | | | |
| | Notes | | | | | | | | |

■ Luminaire Configuration

| | | | |
|------------------|---|-------------|--|
| Mounting Options | <input type="checkbox"/> Surface Mounted <input type="checkbox"/> Wall Mounted | Supply Lead | <input type="checkbox"/> 3Core Flex 2m <input type="checkbox"/> 5Core Flex <input type="checkbox"/> Flex & Plug 1.5m <input type="checkbox"/> Terminal Block |
| Connectivity | <input type="checkbox"/> Casambi <input type="checkbox"/> TRIDONIC basicDIM Wireless <input type="checkbox"/> Xicato Galaxi | Driver | <input type="checkbox"/> Integral <input type="checkbox"/> Remote |
| Accessories | <input type="checkbox"/> LED Downlight <input type="checkbox"/> LED Uplight <input type="checkbox"/> EM Module | | |

"XYZ" - Part No. to be advised by 3S Lighting based on the combination of configurable options selected

■ Notes

■ Project Information

| | | | |
|----------------|--|--------------------|--|
| Project Name: | | Type: | |
| Quantity: | | Expected Due Date: | |
| Client's Name: | | Date of Issue: | |
| Notes: | | Signature: | |

■ Light Source



Tallex LLE24 Boards ADV Gen5

Initial Color Consistency: 3 SDCM Lumen Maintenance: L70/B10 at 72,000 hours Color Temperatures: 2700K, 3000K, 4000K Warranty: 5 years Long life-time: up to 72,000 hours

[... click for more information](#)

■ APPs (with XID / TBW driver only)



CASAMBI, Tridonic basicDim Wireless and XICATO Galaxi Lighting control solutions provide for all the control options that are expected from a full featured professional lighting control solution, Apps available for both iOS and Android.

[... click for more information](#)